#### PREDICTED ENERGY ASSESSMENT




Plot 189, 2 Bed, K, B, WC Dwelling type: Date of assessment: Produced by: Total floor area:

House, End-Terrace 21/02/2020 Andrew McManus 76.04 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

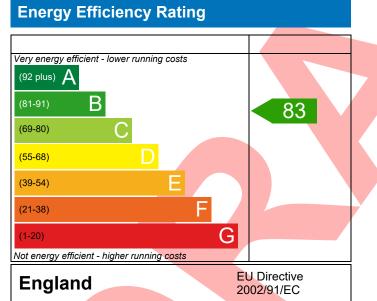

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

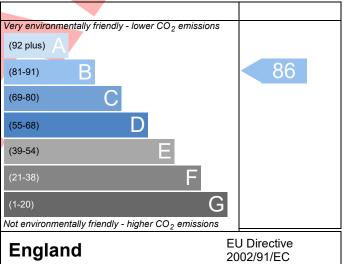

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property Reference	y Reference 4907-0023-4799-189 Issued on						21/02/2020		
Assessment	189		Prop Type Ref SH240 - End (As)						
Reference Property	Plot 189, 2 Bed, K								
. ,	PIOL 169, 2 Bed, K	, b, vvс		1		_			
SAP Rating			83 B	DER	17.94	TER	18.99		
Environmental			86 B	% DER <ter 5.54<="" td=""><td></td></ter>					
CO <sub>2</sub> Emissions (t/year)			1.17	DFEE	45.27	TFEE	51.51		
General Requirements Compliance			Pass % DFEE <tfee 12.11<="" td=""><td></td></tfee>						
	Mr. Andrew McManu andrew.mcmanus@a		rew McManus, Tel: 01455 883250, Assessor ID P638-0001						
Client	South West, Bovis Ho	omes							
UMARY FOR INPUT	DATA FOR New Build	l (As Desig	gned)						
riterion 1 – Achievir	ig the TER and TFEE r	ate							
a TER and DER									
Fuel for main heat	ing		Mains ga	as					
Fuel factor	-		1.00 (ma						
Target Carbon Dioxide Emission Rate (TER)			18.99			kgCO <sub>2</sub> /m <sup>2</sup>			
Dwelling Carbon	oioxide Emission Rate	(DER)	17.94			kgCO <sub>2</sub> /m <sup>2</sup>	Pass		
			-1.05 (-5	.5%)		kgCO <sub>2</sub> /m <sup>2</sup>			
b TFEE and DFEE									
Target Fabric Energy Efficiency (TFEE)			51.51 kWh/m²/yr						
Dwelling Fabric Er	ergy Efficiency (DFEE	)	45.27			kWh/m²/yr			
			-6.2 (-12	.0%)		kWh/m²/yr	Pass		
riterion 2 – Limits o				_					
Limiting Fabric Sta	andards								
2 Fabric U-values									
Element		Averag			Highest				
External wa	all		nax. 0.30)		0.25 (max. 0.70	))	Pass		
Party wall			nax. 0.20)		-		Pass		
Floor			nax. 0.25)		0.17 (max. 0.70		Pass		
Roof			nax. 0.20)		0.12 (max. 0.35		Pass		
			max. 2.00) 1.40 (max. 3.			))	Pass		
2a Thermal bridgi									
_	ng calculated from lir	near thern	nal transmit	tances for each j	unction				
3 Air permeability									
Air permeability at 50 pascals			5.00 (design value) 10.0			m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa			
	Maximum Limiting System Efficiencies					m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa Pass			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02

## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Boiler system with radiators or underfloor - Mains gas	Pass				
Minimum: 88.0%					
None					
No cylinder					
Programmer, room thermostat and TRVs	Pass				
No cylinder					
Yes	Pass				
100 %					
75 %	Pass				
0.1700 0.1800					
0.7	Pass				
mmer					
Not significant	Pass				
Average					
DER and DFEE rate					
U-value					
	Dage				
0.00 W/m²K	Pass				
	Pass				
0.00 W/m²K					
0.00 W/m <sup>2</sup> K 5.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 P	a				
0.00 W/m²K	a				
0.00       W/m²K         5.00 (design value)       m³/(h.m²) @ 50 P         10.0       m³/(h.m²) @ 50 P	a				
0.00       W/m²K         5.00 (design value)       m³/(h.m²) @ 50 P         10.0       m³/(h.m²) @ 50 P         0.00       W/m²K	a				
0.00       W/m²K         5.00 (design value)       m³/(h.m²) @ 50 P         10.0       m³/(h.m²) @ 50 P	a				
	Data from database   Potterton Assure 30 Combi   Combi boiler   Efficiency: 89.0% SEDBUK2009   Minimum: 88.0%   None   No cylinder   Programmer, room thermostat and TRVs   No cylinder   Yes   100   %   75   %   0.1700 0.1800   0.7   mmer   Not significant				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



### RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£29	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£320	A 96	A 98	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£349	A 96	A 98	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.12r02